

SPARX™ Guide Posts



LEFT HAND VIEW


RIGHT HAND VIEW

red reflective tape

6 bright LED's
in red diffuser



solar panel fitted
securely on top

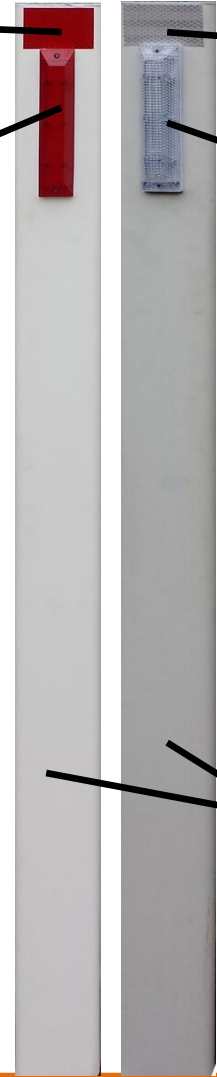

white reflective tape

6 bright LED's
in white diffuser

EXTRA FEATURES

Battery life > 3 years

**Can be seen from
more than 100m**

uPVC non-shattering post



CONTACT

m: 0405 334 568

e: admin@allroundsafety.com.au

| | | |
|-------------------------|--------------------|---|
| Solar Cell | Type | Poly-Crystalline Silicon |
| | Voltage | 4.5V |
| | Current | 100mA |
| Battery | Type | Heat-Resistance Ni-MH |
| | Voltage | 3.7V |
| | Capacity | 1800mAH |
| | Life | > 3 years |
| | Work Temperature | -25 to +55 degree C |
| LED | Size | φ5mm |
| | Number | 6 per side |
| | Colour | White |
| | Luminous mode | Steady |
| | Luminous Intensity | 12000mcd/pc |
| Operation Time | | 72 hours after full charge |
| Life Span | | > 3 years |
| Material of Body | | High Quality uPVC |
| Size | | 1350x100x100x100x80mm |
| Diffuser | Material | Polycarbonate |
| | Size | 40x180mm |
| | Colour | White or Red |
| Type of Reflective Tape | | 45mmx80mm 3M High-Intensity Prismatic Grade |
| Water Proof Grade | | IP>44 |
| View Distance | | > 100 metres |

CONTACT

m: 0405 334 568

e: admin@allroundsafety.com.au

SPARX™ Guide Post

Installation Guide

SPARX™ guide posts have been designed specifically for the roadside, angled to ensure optimum visibility.

The red front view is to face oncoming traffic.

The straight side edges should be placed parallel to the road.

TO INSTALL SPARX™ GUIDE POSTS:

Make a hole to the required depth, insert the post, backfill and compact the earth.

Always install to the depth mark indicator shown on the product depth mark sticker which is positioned 1000mm from the top of the post.

